


FilterLab™

Active Filter Software Design Tool

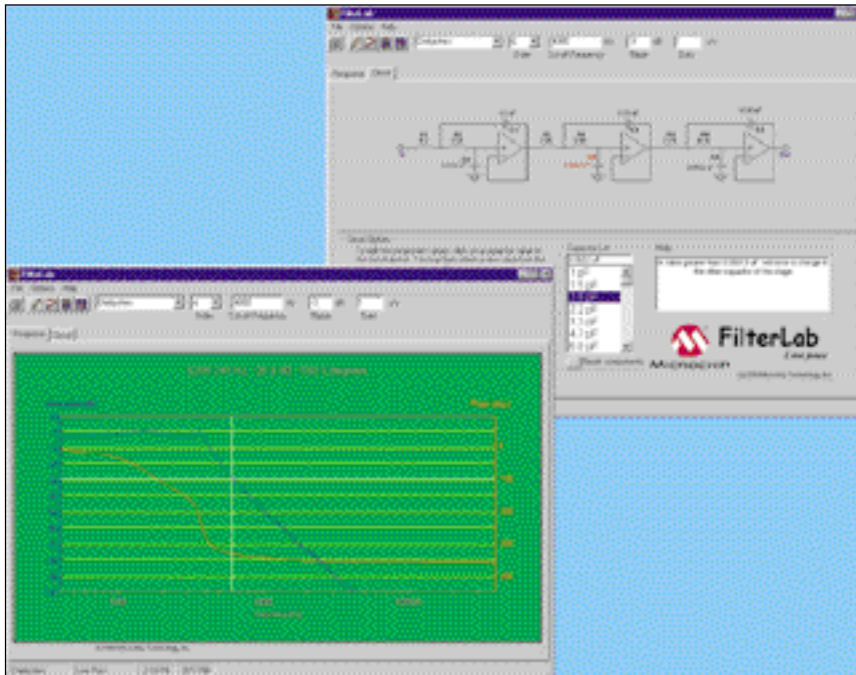

The difficult job of low-pass, active filter design is made easy with FilterLab software.

FilterLab is an innovative software tool that simplifies active filter design. Available at no cost from Microchip's web site (www.microchip.com), the FilterLab active filter software design tool provides full schematic diagrams of the filter circuit with component values and displays the frequency response.

FilterLab allows the design of low-pass filters up to an 8th order filter with Chebyshev, Bessel or Butterworth responses from frequencies of 0.1 Hz to 10 MHz. Users can select a flat passband or sharp transition from passband to stopband. Options, such as minimum ripple factor, sharp transition and linear phase delay, are available. Once the filter response has been identified, FilterLab generates the frequency response and the circuit. For maximum design flexibility, changes in capacitor values can be implemented to fit the demands of the application. FilterLab will recalculate all values to meet the desired response, allowing real-world values to be substituted or changed as part of the design process.

FilterLab also generates a spice model of the designed filter. Extraction of this model will allow time domain analysis in spice simulations, streamlining the design process.

Further consideration is given to designs used in conjunction with an analog-to-digital converter. A suggested filter can be generated by simply inputting the bit resolution and sample rate via the Anti-Aliasing Wizard. This eliminates erroneous signals folded back into the digital data due to the aliasing effect.

Features:

- Multiple Filter Order and Responses with Gain Option
 - Ability to select Bessel, Butterworth or Chebyshev filter response
 - Up to 8th-order filters can be simulated
 - Circuit diagram and component values given
- Bode Plot with Phase Margin
 - Resultant Bode plot generated
- Circuit Implementation
 - Standard 1 percent resistors
 - Standard capacitor values generate and user adjustable
 - Circuit configuration: Sallen-Key (noninverting) or multiple feedback (inverting)
- Spice Model Generated
 - Spice Model of entire filter generated
 - Allows for streamline of simulations
- Anti-Aliasing Wizard
 - Filter optimization for Analog-to-Digital Converter base on bit resolution and sample rate

Ordering Information:

Model Name:

FilterLab

Devices Supported:

PC

Host System Requirements:

PC with 386 or higher processor.

Pentium® recommended

8 MB Memory, 32 MB recommended

16 MB hard disk space, 20 MB recommended

600 x 800 Monitor

Microsoft® Windows 95/98

CD-ROM Drive

Customer Support:

Microchip maintains a worldwide network of distributors, representatives, local sales offices, Field Application Engineers and Corporate Application Engineers. Microchip's Internet home page can be reached at: www.microchip.com

Development Tools from Microchip	
MPLAB® IDE	Integrated Development Environment
MPASM™ Assembler	Universal PICmicro macro-assembler
MPLINK™ Object Linker	Linker
MPLIB™ Object Librarian	Librarian
MPLAB® C17	C compiler for PIC17CXXX MCUs
MPLAB® C18	C compiler for PIC18CXXX MCUs
C Compilers	Sold by third-party vendors (HI-TECH, IAR, CCS)
MPLAB® SIM Simulator	Software Simulator
MPLAB® ICD	In-Circuit Debugger
ICEPIC™ Emulator	Low-cost in-circuit emulator
MPLAB® ICE 2000	Full-featured modular in-circuit emulator
PICSTART® Plus Programmer	Entry-level development kit with programmer
PRO MATE® II Device Programmer	Full-featured, modular device programmer
KEELOQ® Evaluation Kit	Encoder/Decoder evaluator
KEELOQ® Transponder Evaluation Kit	Transmitter/Transponder evaluator
microID™ Developer's Kit	125 kHz and 13.56 MHz RFID development tools
MCP2510 CAN Developer's Kit	MCP2510 CAN evaluation/development tool
MXDEV™ 1 Analog Evaluation System	Evaluation kit for MCP devices

Americas

Atlanta (770) 640-0034
 Austin-Analog (512) 345-2030
 Boston (978) 692-3848
 Boston-Analog (978) 371-6400
 Chicago (630) 285-0071
 Dallas (972) 818-7423
 Dayton (937) 291-1654
 Detroit (248) 538-2250
 Los Angeles (949) 263-1888
 Mountain View-Analog (650) 968-9241
 New York (631) 273-5305
 San Jose (408) 436-7950
 Toronto (905) 673-0699

Asia/Pacific

Australia 61 2 9868 6733
 China-Beijing 86 10 85282100
 China-Shanghai 86 21 6275 5700
 Hong Kong 852 2401 1200
 India 91 80 2290061
 Japan 81 45 471 6166
 Korea 82 2 554 7200
 Singapore 65 334 8870
 Taiwan 886 2 2717 7175

Europe

Denmark 45 4420 9895
 France 33 1 69 53 63 20
 Germany 49 89 627 144 0
 Germany-Analog 49 89 895650 0
 Italy 39 039 65791 1
 United Kingdom 44 118 921 5869

As of 02/01/01



MICROCHIP
 The Embedded Control Solutions Company®

Microchip Technology Inc. • 2355 W. Chandler Blvd. • Chandler, AZ 85224-6199 • (480) 792-7200 • Fax (480) 792-9210

The Microchip name, logo, PIC, PICmicro, PICMASTER, PICSTART, PRO MATE, KEELOQ, SEEVAL, MPLAB and The Embedded Control Solutions Company are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries. Total Endurance, ICSP In-Circuit Serial Programming, FilterLab, MXDEV, microID, FlexROM, fuzzyLAB, MPASM, MPLINK, MPLIB, PICDEM, ICEPIC, Migratable Memory, FanSense, ECONOMONITOR, SelectMode and microPort are trademarks and SQTP is a service mark of Microchip Technology Inc. All other trademarks mentioned herein are the property of their respective companies. Information subject to change. © 2001 Microchip Technology Inc. All rights reserved. Printed in the U.S.A. DS51204B 2/01