


Discover Storage

SD-R5272

DVD -/+ R/RW
DVD/CD Writer

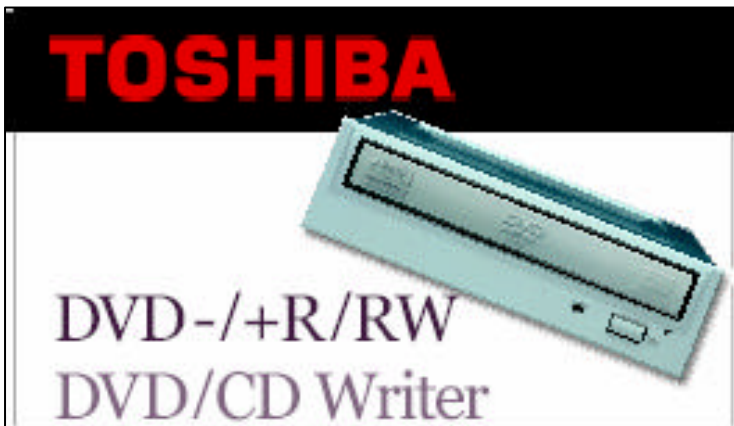

Features Include: ATAPI Interface. 2MB Buffer Memory. 100,000 Hours MTBF. Buffer Underrun Prevention.

Retail Kit Include: IDE DVD -/+ R/RW Drive. Multilingual Installation Guide. Cables and Leads. Manuals & More CD. Pinnacle DVD CD Software. Media Assortment.

Toshiba Storage Device Division leads the market in the development, design and manufacturing of DVD-RAM, DVD-ROM, Combination drives and PC Card & mobile hard disk drives. SDD markets high-quality peripherals to original equipment manufacturers, value-added resellers, value-added dealers, system integrators and distributors in Europe. Inherent in the company's product line is high-quality engineering and manufacturing which has established Toshiba products as worldwide leaders.

Supported Disc Formats: <Read>
DVD-ROM, DVD-R, DVD+R, DVD-RW, DVD+RW, DVD-RAM, CD-ROM, CD-R, CD-RW, CD-DA, CD+(E)G, CD-MIDI, CD-TEXT, CD-ROM XA, CD-I, CD-I Bridge (PhotoCD, VideoCD), Multisession CD (PhotoCD, CD-EXTRA, CD-R, CD-RW)
<Write>
DVD-R, DVD+R, DVD-RW, DVD+RW, CD-R, CD-RW, CD-DA, CD+(E)G, CD-MIDI, CD-ROM XA, CD-I, CD-I Bridge (PhotoCD, VideoCD), CD-TEXT
Multisession CD (PhotoCD, CD-EXTRA), mixed mode CD, disc at once, session at once, track at once, packet writing

Interface: ATAPI/IDE
Random Seek Time:
DVD-ROM 120ms, DVD-RAM:160ms
CD: 105ms

Continuous Data Transfer Rate:
<Read>
DVD-R/+R: 8x (max) 10,800KB/sec
DVD-RW/+RW: 6x (max) 8100KB/sec
DVD-RAM: 2x (max) 2700KB/sec
DVD-ROM: 12x (max) 16,200KB/sec
CD-ROM: (40x max) 6,000KB/sec
CD-DA: (24x max) 3,600KB/sec
<Write>
CD-R: 32x (max), CD-RW: 16x (max)
DVD-R/+R: 8x (max)
DVD-RW/+RW: 4x (max)

Buffer Capacity: 2MB
Power Consumption:
MTBF: 100,000 hours
Power Source: + 5V/+12V
Operating temperature
5-50°C (excluding media)

External dimensions (WxHxD)
146mm x 41.5mm x 189,5mm
Weight 1.0kg